# SAUNA



**HEATERS** 





# Rediscover SAWO sauna heaters.

Reliable. Economic. Durable. Those are the streamlines of SAWO stainless electric sauna heaters.

SAWO heaters continuously evolve to give you the best sauna experience. Each of these heaters has own character that is fine-tuned to your sauna bathing desires. SAWO heaters possess fast heating capacity and energy saving features. Examine each of these heaters and get the most compatible for your sauna.






# **Tower Stone Spacer**

SAWO Tower heaters are upgraded to serve all sauna enthusiasts better. All our Tower heaters (Round, Corner and Wall) are now with stone spacer.

SAWO Tower heaters have different characteristics using with or without the stone spacer, and the end customer can decide whether to use it or not based on their own preferences.








# **No Stone Spacer**

- More stones means more steam
- · Softer steam
- · Milder room temperature
- Massive amount of stones keep heat for a longer time
- Energy efficient for commercial use where the heater is on long periods of time



#### With Stone Spacer

- Heating up time is reduced which saves electricity
- Extend life span of heating element
- Improves air circulation
- · Hotter room temperature
- 15-40% less stones





#### **Round Tower Heater**

Round Tower heater is a tall sauna heater that can handle up to 360 kilograms of stones. The solid steel ring rods of tower heater support the huge amount of stones. There is a minimal water deflection when throwing water unto the heater as the rods are round and thin. The result is a better steam inside your sauna room.

Round tower heaters are best in the middle of the sauna room. Power ranges are from 3 kW until 24 kW.




\*Ni models are with integrated Innova control. Innova control gives bathers plenty of features for a desirable sauna.





| HEATER<br>MODEL | kW   | SAUNA<br>MIN<br>(m | MAX | SIZE | OF HE | ATER<br>HEIGHT | STC<br>Without<br>Stone Spacer (ke | ONES With G) Stone Spacer | CONTROL  |
|-----------------|------|--------------------|-----|------|-------|----------------|------------------------------------|---------------------------|----------|
| TH2-30NB        | 3.0  | 2                  | 4   | 260  | 260   | 1300           | 70                                 | 60                        | built-in |
| TH2-35NB        | 3.5  | 3                  | 6   | 260  | 260   | 1300           | 70                                 | 60                        | built-in |
| TH3-45NB        | 4.5  | 3                  | 6   | 260  | 260   | 1300           | 70                                 | 60                        | built-in |
| TH3-60NB        | 6.0  | 5                  | 8   | 260  | 260   | 1300           | 70                                 | 60                        | built-in |
| TH2-30NS        | 3.0  | 2                  | 4   | 260  | 260   | 1300           | 70                                 | 60                        | separate |
| TH3-35NS        | 3.5  | 3                  | 6   | 260  | 260   | 1300           | 70                                 | 60                        | separate |
| TH3-45NS        | 4.5  | 3                  | 6   | 260  | 260   | 1300           | 70                                 | 60                        | separate |
| TH3-60NS        | 6.0  | 5                  | 8   | 260  | 260   | 1300           | 70                                 | 60                        | separate |
| TH4-60NB        | 6.0  | 5                  | 9   | 315  | 315   | 1300           | 105                                | 90                        | built-in |
| TH4-60NS        | 6.0  | 5                  | 9   | 315  | 315   | 1300           | 105                                | 90                        | separate |
| TH5-80NB        | 8.0  | 7                  | 13  | 315  | 315   | 1300           | 105                                | 90                        | built-in |
| TH5-80NS        | 8.0  | 7                  | 13  | 315  | 315   | 1300           | 105                                | 90                        | separate |
| TH5-90NS        | 9.0  | 8                  | 14  | 315  | 315   | 1300           | 105                                | 90                        | separate |
| TH6-80NB        | 8.0  | 7                  | 14  | 365  | 365   | 1300           | 160                                | 100                       | built-in |
| TH6-90NB        | 9.0  | 8                  | 15  | 365  | 365   | 1300           | 160                                | 100                       | built-in |
| TH6-80NS        | 8.0  | 7                  | 14  | 365  | 365   | 1300           | 160                                | 100                       | separate |
| TH6-90NS        | 9.0  | 8                  | 15  | 365  | 365   | 1300           | 160                                | 100                       | separate |
| TH6-105NS       | 10.5 | 9                  | 16  | 365  | 365   | 1300           | 160                                | 100                       | separate |
| TH6-120NS       | 12.0 | 11                 | 18  | 365  | 365   | 1300           | 160                                | 100                       | separate |
| TH6-80Ni        | 8.0  | 7                  | 14  | 365  | 365   | 1300           | 160                                | 100                       | innova   |
| TH6-90Ni        | 9.0  | 8                  | 15  | 365  | 365   | 1300           | 160                                | 100                       | innova   |
| TH6-105Ni       | 10.5 | 9                  | 16  | 365  | 365   | 1300           | 160                                | 100                       | innova   |
| TH6-120Ni       | 12.0 | 11                 | 18  | 365  | 365   | 1300           | 160                                | 100                       | innova   |
| TH9-105NS       | 10.5 | 10                 | 16  | 450  | 450   | 1300           | 230                                | 165                       | separate |
| TH9-120NS       | 12.0 | 11                 | 20  | 450  | 450   | 1300           | 230                                | 165                       | separate |
| TH9-150NS       | 15.0 | 14                 | 25  | 450  | 450   | 1300           | 230                                | 165                       | separate |
| TH9-180NS       | 18.0 | 18                 | 28  | 450  | 450   | 1300           | 230                                | 165                       | separate |
| TH9-105Ni       | 10.5 | 10                 | 16  | 450  | 450   | 1300           | 230                                | 165                       | innova   |
| TH9-120Ni       | 12.0 | 11                 | 20  | 450  | 450   | 1300           | 230                                | 165                       | innova   |
| TH9-150Ni       | 15.0 | 14                 | 25  | 450  | 450   | 1300           | 230                                | 165                       | innova   |
| TH12-150NS      | 15.0 | 15                 | 26  | 545  | 545   | 1300           | 360                                | 220                       | separate |
| TH12-180NS      | 18.0 | 18                 | 30  | 545  | 545   | 1300           | 360                                | 220                       | separate |
| TH12-210NS      | 21.0 | 22                 | 35  | 545  | 545   | 1300           | 360                                | 220                       | separate |
| TH12-240NS      | 24.0 | 24                 | 40  | 545  | 545   | 1300           | 360                                | 220                       | separate |
| TH12-150Ni      | 15.0 | 15                 | 26  | 545  | 545   | 1300           | 360                                | 220                       | innova   |
| TH12-180Ni      | 18.0 | 18                 | 30  | 545  | 545   | 1300           | 360                                | 220                       | innova   |
| TH12-210Ni      | 21.0 | 22                 | 35  | 545  | 545   | 1300           | 360                                | 220                       | innova   |
| TH12-240Ni      | 24.0 | 24                 | 40  | 545  | 545   | 1300           | 360                                | 220                       | innova   |







# **Wall Tower Heater**

Wall Tower Heater is ideally placed on the sauna wall. It conserves space inside your sauna, Available with built-in and is separate control or with integrated innova control (Ni Models).

Power ratings of the Wall Tower Heaters varies from 3 - 24 kW.



\*Ni models are with integrated Innova control. Innova control gives bathers plenty of features for a desirable sauna.

| HEATER<br>MODEL | kW   | MIN | ROOM | SIZE | OF HE | ATER<br>HEIGHT | Without | ONES<br>With    | CONTROL  |
|-----------------|------|-----|------|------|-------|----------------|---------|-----------------|----------|
|                 |      | (m  |      |      | (mm)  |                | ,       | G) Stone Spacer |          |
| TH2-30NB-WL     | 3.0  | 2   | 4    | 385  | 230   | 1395           | 70      | 60              | built-in |
| TH2-35NB-WL     | 3.5  | 3   | 6    | 385  | 230   | 1395           | 70      | 60              | built-in |
| TH3-45NB-WL     | 4.5  | 3   | 6    | 385  | 230   | 1395           | 70      | 60              | built-in |
| TH3-60NB-WL     | 6.0  | 5   | 8    | 385  | 230   | 1395           | 70      | 60              | built-in |
| TH2-30NS-WL     | 3.0  | 2   | 4    | 385  | 230   | 1395           | 70      | 60              | separate |
| TH3-35NS-WL     | 3.5  | 3   | 6    | 385  | 230   | 1395           | 70      | 60              | separate |
| TH3-45NS-WL     | 4.5  | 3   | 6    | 385  | 230   | 1395           | 70      | 60              | separate |
| TH3-60NS-WL     | 6.0  | 5   | 8    | 385  | 230   | 1395           | 70      | 60              | separate |
| TH4-60NB-WL     | 6.0  | 5   | 9    | 475  | 250   | 1395           | 120     | 90              | built-in |
| TH4-60NS-WL     | 6.0  | 5   | 9    | 475  | 250   | 1395           | 120     | 90              | separate |
| TH5-80NB-WL     | 8.0  | 7   | 13   | 475  | 250   | 1395           | 120     | 90              | built-in |
| TH5-80NS-WL     | 8.0  | 7   | 13   | 475  | 250   | 1395           | 120     | 90              | separate |
| TH5-90NS-WL     | 9.0  | 8   | 14   | 475  | 250   | 1395           | 120     | 90              | separate |
| TH6-80NB-WL     | 8.0  | 7   | 14   | 550  | 320   | 1395           | 160     | 105             | built-in |
| TH6-90NB-WL     | 9.0  | 8   | 15   | 550  | 320   | 1395           | 160     | 105             | built-in |
| TH6-80NS-WL     | 8.0  | 7   | 14   | 550  | 320   | 1395           | 160     | 105             | separate |
| TH6-90NS-WL     | 9.0  | 8   | 15   | 550  | 320   | 1395           | 160     | 105             | separate |
| TH6-105NS-WL    | 10.5 | 9   | 16   | 550  | 320   | 1395           | 160     | 105             | separate |
| TH6-120NS-WL    | 12.0 | 11  | 18   | 550  | 320   | 1395           | 160     | 105             | separate |
| TH6-80Ni-WL     | 8.0  | 7   | 14   | 550  | 320   | 1395           | 160     | 105             | innova   |
| TH6-90Ni-WL     | 9.0  | 8   | 15   | 550  | 320   | 1395           | 160     | 105             | innova   |
| TH6-105Ni-WL    | 10.5 | 9   | 16   | 550  | 320   | 1395           | 160     | 105             | innova   |
| TH6-120Ni-WL    | 12.0 | 11  | 18   | 550  | 320   | 1395           | 160     | 105             | innova   |
| TH9-105NS-WL    | 10.5 | 10  | 16   | 650  | 355   | 1395           | 180     | 115             | separate |
| TH9-120NS-WL    | 12.0 | 11  | 20   | 650  | 355   | 1395           | 180     | 115             | separate |
| TH9-150NS-WL    | 15.0 | 14  | 25   | 650  | 355   | 1395           | 180     | 115             | separate |
| TH9-180NS-WL    | 18.0 | 18  | 28   | 650  | 355   | 1395           | 180     | 115             | separate |
| TH9-105Ni       | 10.5 | 10  | 16   | 650  | 355   | 1395           | 180     | 115             | innova   |
| TH9-120Ni       | 12.0 | 11  | 20   | 650  | 355   | 1395           | 180     | 115             | innova   |
| TH9-150Ni       | 15.0 | 14  | 25   | 650  | 355   | 1395           | 180     | 115             | innova   |
| TH12-150NS-WL   | 15.0 | 15  | 26   | 790  | 425   | 1395           | 250     | 165             | separate |
| TH12-180NS-WL   | 18.0 | 18  | 30   | 790  | 425   | 1395           | 250     | 165             | separate |
| TH12-210NS-WL   | 21.0 | 22  | 35   | 790  | 425   | 1395           | 250     | 165             | separate |
| TH12-240NS-WL   | 24.0 | 24  | 40   | 790  | 425   | 1395           | 250     | 165             | separate |
| TH12-150Ni-WL   | 15.0 | 15  | 26   | 790  | 425   | 1395           | 250     | 165             | innova   |
| TH12-180Ni-WL   | 18.0 | 18  | 30   | 790  | 425   | 1395           | 250     | 165             | innova   |
| TH12-210Ni-WL   | 21.0 | 22  | 35   | 790  | 425   | 1395           | 250     | 165             | innova   |
| TH12-240Ni-WL   | 24.0 | 24  | 40   | 790  | 425   | 1395           | 250     | 165             | innova   |



# **Corner Tower Heater**

Corner Tower heaters, as its name suggests, are placed in the corner of the sauna room. The design of these heaters gives you more flexibility with your sauna room layout.

Corner Tower heaters are available with built-in control, separate control or with integrated Innova control system.



\*Ni models are with integrated Innova control. Innova control gives bathers plenty of features for a desirable sauna.





| HEATER<br>MODEL | kW   | MIN | SAUNA ROOM<br>MIN MAX<br>(m³) |     | OF HE<br>DEPTH<br>(mm) | ATER<br>HEIGHT | Without | ONES<br>With<br>(G) Stone Spacer | CONTROL  |
|-----------------|------|-----|-------------------------------|-----|------------------------|----------------|---------|----------------------------------|----------|
| TH2-30NB-CNR    | 3.0  | 2   | 4                             | 300 | 300                    | 1380           | 70      | 45                               | built-in |
| TH2-35NB-CNR    | 3.5  | 3   | 6                             | 300 | 300                    | 1380           | 70      | 45                               | built-in |
| TH3-45NB-CNR    | 4.5  | 3   | 6                             | 300 | 300                    | 1380           | 70      | 45                               | built-in |
| TH3-60NB-CNR    | 6.0  | 5   | 8                             | 300 | 300                    | 1380           | 70      | 45                               | built-in |
| TH2-30NS-CNR    | 3.0  | 2   | 4                             | 300 | 300                    | 1380           | 70      | 45                               | separate |
| TH3-35NS-CNR    | 3.5  | 3   | 6                             | 300 | 300                    | 1380           | 70      | 45                               | separate |
| TH3-45NS-CNR    | 4.5  | 3   | 6                             | 300 | 300                    | 1380           | 70      | 45                               | separate |
| TH3-60NS-CNR    | 6.0  | 5   | 8                             | 300 | 300                    | 1380           | 70      | 45                               | separate |
| TH4-60NB-CNR    | 6.0  | 5   | 9                             | 355 | 355                    | 1380           | 105     | 70                               | built-in |
| TH4-60NS-CNR    | 6.0  | 5   | 9                             | 355 | 355                    | 1380           | 105     | 70                               | separate |
| TH5-80NB-CNR    | 8.0  | 7   | 13                            | 355 | 355                    | 1380           | 105     | 70                               | built-in |
| TH5-80NS-CNR    | 8.0  | 7   | 13                            | 355 | 355                    | 1380           | 105     | 70                               | separate |
| TH5-90NS-CNR    | 9.0  | 8   | 14                            | 355 | 355                    | 1380           | 105     | 70                               | separate |
| TH6-80NB-CNR    | 8.0  | 7   | 14                            | 415 | 415                    | 1380           | 160     | 80                               | built-in |
| TH6-90NB-CNR    | 9.0  | 8   | 15                            | 415 | 415                    | 1380           | 160     | 80                               | built-in |
| TH6-80NS-CNR    | 8.0  | 7   | 14                            | 415 | 415                    | 1380           | 160     | 80                               | separate |
| TH6-90NS-CNR    | 9.0  | 8   | 15                            | 415 | 415                    | 1380           | 160     | 80                               | separate |
| TH6-105NS-CNR   | 10.5 | 9   | 16                            | 415 | 415                    | 1380           | 160     | 80                               | separate |
| TH6-120NS-CNR   | 12.0 | 11  | 18                            | 415 | 415                    | 1380           | 160     | 80                               | separate |
| TH6-80Ni-CNR    | 8.0  | 7   | 14                            | 415 | 415                    | 1380           | 160     | 80                               | innova   |
| TH6-90Ni-CNR    | 9.0  | 8   | 15                            | 415 | 415                    | 1380           | 160     | 80                               | innova   |
| TH6-105Ni-CNR   | 10.5 | 9   | 16                            | 415 | 415                    | 1380           | 160     | 80                               | innova   |
| TH6-120Ni-CNR   | 12.0 | 11  | 18                            | 415 | 415                    | 1380           | 160     | 80                               | innova   |









# **Tower Heater Guards and Integration Collars**

Heater guards are precautionary measure against accidental contact with the heater while integration collars add accent and beauty to your sauna interior. Guard rails are made from Cedar or Aspen wood and are mounted to the heater. Integration collars are available either from thick hairline stainless steel metal, soft metamorphic rock soapstones or from strong laminated wood. All of them has a design to fit for Round. Wall and Corner Tower heaters!















Integration Collars

















Corner









#### **Round Aries Tower Heater**

The Aries is known for its fast heating capability and adequate amount of stones that is good for small and medium-sized sauna rooms. A luscious sauna is guaranteed with stack of heated stones. Aries is also available in 18 kW for big sauna rooms.

All Aries heater timer and thermostat controls can switch sides. This makes it very handy to install the heater.

Aries is a fine choice for current heater upgrades.

| HEATER<br>MODEL | kW   | SAUNA<br>MIN<br>(m | ROOM<br>MAX | SIZE | OF HE | ATER<br>HEIGHT | STONES<br>(kg) | CONTROL  |
|-----------------|------|--------------------|-------------|------|-------|----------------|----------------|----------|
| ARI3-45NB       | 4.5  | 3                  | 6           | 300  | 300   | 930            | 60             | built-in |
| ARI3-60NB       | 6.0  | 5                  | 8           | 300  | 300   | 930            | 60             | built-in |
| ARI3-75NB       | 7.5  | 7                  | 12          | 300  | 300   | 930            | 60             | built-in |
| ARI3-90NB       | 9.0  | 8                  | 14          | 300  | 300   | 930            | 60             | built-in |
| ARI3-45NS       | 4.5  | 3                  | 6           | 300  | 300   | 930            | 60             | separate |
| ARI3-60NS       | 6.0  | 5                  | 8           | 300  | 300   | 930            | 60             | separate |
| ARI3-75NS       | 7.5  | 7                  | 12          | 300  | 300   | 930            | 60             | separate |
| ARI3-90NS       | 9.0  | 8                  | 14          | 300  | 300   | 930            | 60             | separate |
| ARI6-90NB       | 9.0  | 8                  | 15          | 360  | 360   | 930            | 110            | built-in |
| ARI6-90NS       | 9.0  | 8                  | 15          | 360  | 360   | 930            | 110            | separate |
| ARI6-105NS      | 10.5 | 9                  | 16          | 360  | 360   | 930            | 110            | separate |
| ARI6-120NS      | 12.0 | 10                 | 18          | 360  | 360   | 930            | 110            | separate |
| ARI6-150NS      | 15.0 | 13                 | 24          | 360  | 360   | 930            | 110            | separate |
| ARI6-180NS      | 18.0 | 18                 | 30          | 360  | 360   | 930            | 110            | separate |











# **Corner Aries Tower Heater**

Corner Aries Tower Heater can conserve much of your limited sauna room space. The bathers are more secured from accidental contact as it is placed in the corner.

The thermostat and timer controls can switch sides. This makes it more convenient for the user when using the sauna.

| HEATER<br>MODEL | kW  | MIN | A ROOM<br>MAX<br>m³) | SIZE | OF HE | ATER<br>HEIGHT | STONES (kg) | CONTROL  |
|-----------------|-----|-----|----------------------|------|-------|----------------|-------------|----------|
| ARI3-45NB-CNR   | 4.5 | 3   | 6                    | 335  | 335   | 1000           | 60          | built-in |
| ARI3-60NB-CNR   | 6.0 | 5   | 8                    | 335  | 335   | 1000           | 60          | built-in |
| ARI3-75NB-CNR   | 7.5 | 7   | 12                   | 335  | 335   | 1000           | 60          | built-in |
| ARI3-90NB-CNR   | 9.0 | 8   | 14                   | 335  | 335   | 1000           | 60          | built-in |
| ARI3-45NS-CNR   | 4.5 | 3   | 6                    | 335  | 335   | 1000           | 60          | separate |
| ARI3-60NS-CNR   | 6.0 | 5   | 8                    | 335  | 335   | 1000           | 60          | separate |
| ARI3-75NS-CNR   | 7.5 | 7   | 12                   | 335  | 335   | 1000           | 60          | separate |
| ARI3-90NS-CNR   | 9.0 | 8   | 14                   | 335  | 335   | 1000           | 60          | separate |











#### **Wall Aries Tower Heater**

Wall Aries heater is best for narrow benches as it can lean on the sides of the wall. These heaters suit well if you plan to upgrade your old wall mounted heaters.

The wide and tall body of wall tower heaters will perfectly cover the markings on the wall made from your previous heater. One of the advantage of Aries built-in heater is that the thermostat and the timer controls can switch sides! The access of the controls is much more flexible.

| HEATER<br>MODEL | kW  | MIN | A ROOM<br>MAX<br>m³) | SIZE | OF HE<br>DEPTH<br>(mm) | ATER<br>HEIGHT | STONES<br>(kg) | CONTROL  |
|-----------------|-----|-----|----------------------|------|------------------------|----------------|----------------|----------|
| ARI3-45NB-WL    | 4.5 | 3   | 6                    | 415  | 250                    | 1030           | 65             | built-in |
| ARI3-60NB-WL    | 6.0 | 5   | 8                    | 415  | 250                    | 1030           | 65             | built-in |
| ARI3-75NB-WL    | 7.5 | 7   | 12                   | 415  | 250                    | 1030           | 65             | built-in |
| ARI3-90NB-WL    | 9.0 | 8   | 14                   | 415  | 250                    | 1030           | 65             | built-in |
| ARI3-45NS-WL    | 4.5 | 3   | 6                    | 415  | 250                    | 1030           | 65             | separate |
| ARI3-60NS-WL    | 6.0 | 5   | 8                    | 415  | 250                    | 1030           | 65             | separate |
| ARI3-75NS-WL    | 7.5 | 7   | 12                   | 415  | 250                    | 1030           | 65             | separate |
| ARI3-90NS-WL    | 9.0 | 8   | 14                   | 415  | 250                    | 1030           | 65             | separate |











#### **Phoenix Tower Heater**

Complete your sauna with a unique oval shape ring heater. The Phoenix has angled rings that hold the pile of stones in an upward broadening form. There are more exposed stones on the hot heater top that generate bigger amount of steam when water is thrown unto it.

Phoenix heater has faster heating-up time and can hold up to 85 kG of stones. The removable casing is made from tubes that exposes the stones better. Phoenix heater is available with a separate control unit.

| HEATER<br>MODEL | kW   | SAUNA<br>MIN<br>(n | ROOM<br>MAX | SIZE | OF HE<br>DEPTH<br>(mm) | ATER<br>HEIGHT | STONES<br>(kg) | CONTROL  |
|-----------------|------|--------------------|-------------|------|------------------------|----------------|----------------|----------|
| PNX3-45NS       | 4.5  | 3                  | 6           | 375  | 340                    | 1080           | 85             | separate |
| PNX3-60NS       | 6.0  | 5                  | 9           | 375  | 340                    | 1080           | 85             | separate |
| PNX3-75NS       | 7.5  | 7                  | 13          | 375  | 340                    | 1080           | 85             | separate |
| PNX3-90NS       | 9.0  | 8                  | 14          | 375  | 340                    | 1080           | 85             | separate |
| PNX6-90NS       | 9.0  | 8                  | 15          | 525  | 475                    | 1175           | 130            | separate |
| PNX6-105NS      | 10.5 | 9                  | 16          | 525  | 475                    | 1175           | 130            | separate |
| PNX6-120NS      | 12.0 | 11                 | 18          | 525  | 475                    | 1175           | 130            | separate |
| PNX6-150NS      | 15.0 | 14                 | 25          | 525  | 475                    | 1175           | 130            | separate |
| PNX6-180NS      | 18.0 | 18                 | 28          | 525  | 475                    | 1175           | 130            | separate |













# Helius

This exquisite looking modern heater is with slim shape that defies space. The genius airflow design of ventilation in the heater, heats up fresh air inside the sauna room. Only small safety distance (min. 5mm) is required to install Helius heater so you can be more flexible on your sauna room layout. Helius heater is also the good option as a replacement of your old heater.

Helius heaters can also be installed on a recess area of the sauna room that hides it. The heater is supplied with a royal soapstone funnel that is connected with a silicon hose down to the distribution tube. The heating elements are kept separate from the stones which increases its lifespan. The steam comes out from the louver of the division wall. The warm air soothes bathers' skin. The process is regarded as the safest because the heater is concealed from the bather.

| HEATER<br>MODEL | kW  | MIN | A ROOM<br>MAX | SIZE | OF HEA | CONTROL |          |
|-----------------|-----|-----|---------------|------|--------|---------|----------|
| HES-45NS        | 4.5 | 3   | 6             | 860  | 230    | 655     | separate |
| HES-60NS        | 6.0 | 5   | 8             | 860  | 230    | 655     | separate |
| HES-75NS        | 7.5 | 7   | 12            | 860  | 230    | 655     | separate |
| HES-90NS        | 9.0 | 8   | 14            | 860  | 230    | 655     | separate |











# **Taurus**

Taurus heater is with advance sensory system that detects early stage of heating element malfunctions.

Taurus is available in more traditional version of the heater where stones are in contact with heating elements and a more modern approach -Gtype where the rock container keeps stones separated from the heating elements which increases life span of the heating elements.

| HEATER<br>MODEL                 | kW   | MIN | ROOM<br>max | SIZE | OF HEA | ATER<br>HEIGHT | STONES<br>(kg) | CONTROL  |
|---------------------------------|------|-----|-------------|------|--------|----------------|----------------|----------|
| TAU-90NS / TAU-90NS-G           | 9.0  | 8   | 14          | 560  | 570    | 685            | 45/50          | separate |
| TAU-105NS / TAU-105NS-G         | 10.5 | 9   | 15          | 560  | 570    | 685            | 45/50          | separate |
| TAU-120NS / TAU-120NS-G         | 12.0 | 10  | 18          | 560  | 570    | 685            | 45/50          | separate |
| TAU-150NS / TAU-150NS-G         | 15.0 | 14  | 25          | 710  | 570    | 685            | 65/75          | separate |
| TAU-180NS / TAU-180NS-G         | 18.0 | 18  | 30          | 710  | 570    | 685            | 65/75          | separate |
| TAU-180NS-V12 / TAU-180NS-V12-G | 18.0 | 18  | 30          | 950  | 570    | 685            | 90/100         | separate |
| TAU-210NS-V12 / TAU-210NS-V12-G | 21.0 | 22  | 35          | 950  | 570    | 685            | 90/100         | separate |
| TAU-240NS-V12 / TAU-240NS-V12-G | 24.0 | 24  | 40          | 950  | 570    | 685            | 90/100         | separate |











# Mini

Mini heater is the best solution for small sauna rooms (good for 1-2 persons). Its smaller body and movable control panel can make the most of a very small space. Its control panel can either be placed on the left or right side of the heater. Mini can hold 11 kG stones. The Mini is available with either built-in or separate control panel.

Available in 2.3 kW, 3 kW and 3.6 kW.

| HEATER<br>MODEL | kW  | MIN | ROOM<br>MAX | SIZE | OF HEA | ATER<br>HEIGHT | STONES<br>(kg) | CONTROL  |
|-----------------|-----|-----|-------------|------|--------|----------------|----------------|----------|
| MN-23NB         | 2.3 | 1.3 | 2.5         | 435  | 215    | 450            | 11             | built-in |
| MN-30NB         | 3.0 | 2   | 4           | 435  | 215    | 450            | 11             | built-in |
| MN-36NB         | 3.6 | 3   | 6           | 435  | 215    | 450            | 11             | built-in |
| MN-23NS         | 2.3 | 1.3 | 2.5         | 330  | 215    | 450            | 11             | separate |
| MN-30NS         | 3.0 | 2   | 4           | 330  | 215    | 450            | 11             | separate |
| MN-36NS         | 3.6 | 3   | 6           | 330  | 215    | 450            | 11             | separate |















# Mini X

Mini X is ideal for very small sauna rooms (good for 1-2 persons). Especially made to fit in cabin corners or against a flat wall. This provides maximum bathing space.

Can hold 11 kG of sauna stones. Available in 2.3 kW, 3 kW and 3.6 kW.

| HEATER<br>MODEL | kW  | MIN | N ROOM<br>MAX | SI  | ZE OF HEAT<br>DEPTH<br>(mm) | ER<br>HEIGHT | STONES<br>(kg) | CONTROL  |
|-----------------|-----|-----|---------------|-----|-----------------------------|--------------|----------------|----------|
| MX-23NB         | 2.3 | 1.3 | 2.5           | 330 | *320/435                    | 500          | 11             | built-in |
| MX-30NB         | 3.0 | 2   | 4             | 330 | *320/435                    | 500          | 11             | built-in |
| MX-36NB         | 3.6 | 3   | 6             | 330 | *320/435                    | 500          | 11             | built-in |
| MX-23NS         | 2.3 | 1.3 | 2.5           | 330 | *205/320                    | 500          | 11             | separate |
| MX-30NS         | 3.0 | 2   | 4             | 330 | *205/320                    | 500          | 11             | separate |
| MX-36NS         | 3.6 | 3   | 6             | 330 | *205/320                    | 500          | 11             | separate |

<sup>\*</sup>Wall mounted/corner mounted















# Scandia

Scandia is good for small and medium sized sauna rooms (good for 3-6 persons). It has a robust body and increased stone capacity that can hold 18 to 22 kg of stones. Like the Mini heater, it is available either with built-in control unit or separate control panel. Power kilowatt ranges in 4.5 kW, 6 kW, 8 kW and 9 kW.

Scandia 6 to 9 kW heaters are supplied with heat reflector. The heat reflector prevents burn marks on the wall and makes heat to travel on the lower part of the sauna room.

| HEATER<br>MODEL | kW  | SAUNA ROOM<br>MIN MAX<br>(m³) |    | SIZE | OF HEA | ATER<br>HEIGHT | STONES<br>(kg) | CONTROL  |
|-----------------|-----|-------------------------------|----|------|--------|----------------|----------------|----------|
| SCA-45NB        | 4.5 | 3                             | 6  | 515  | 290    | *450           | 22             | built-in |
| SCA-60NB        | 6.0 | 5                             | 8  | 515  | 290    | *450           | 22             | built-in |
| SCA-80NB        | 8.0 | 7                             | 13 | 515  | 290    | 575            | 22             | built-in |
| SCA-90NB        | 9.0 | 8                             | 14 | 515  | 290    | 575            | 22             | built-in |
| SCA-45NS        | 4.5 | 3                             | 6  | 410  | 290    | *450           | 22             | separate |
| SCA-60NS        | 6.0 | 5                             | 8  | 410  | 290    | *450           | 22             | separate |
| SCA-80NS        | 8.0 | 7                             | 13 | 410  | 290    | 575            | 22             | separate |
| SCA-90NS        | 9.0 | 8                             | 14 | 410  | 290    | 575            | 22             | separate |

<sup>\*</sup>Optional heat reflector for Scandia 4.5 kW.

















#### Savonia

The Savonia Family are electric heaters designed to withstand extreme heat that needs little care and maintenance. They can handle large amount of stones for more pleasant sauna steam. Savonia heaters are with adjustable leg support that keeps the heater stand leveled on the floor. Suitable for sauna rooms that are used for apartments, hotels, holiday resorts, fitness centers and other commercial facilities.

The Savonia is available in 9 kW, 10.5 kW and 12 kW. Super Savonia is the middle range that has 15 kW and 18 kW power. Super Savonia V12 can hold up to 100 kG of stones and power range from 18 kW up to 24 kW.

| HEATER<br>MODEL | kW   | MIN | ROOM | SIZ | E OF HE | ATER<br>HEIGHT | STONES<br>(kg) | CONTROL  |
|-----------------|------|-----|------|-----|---------|----------------|----------------|----------|
|                 |      | ,   | n³)  |     | (mm)    |                |                |          |
| SAV-90NS        | 9.0  | 8   | 14   | 440 | 420     | 655            | 50             | separate |
| SAV-105NS       | 10.5 | 9   | 15   | 440 | 420     | 655            | 50             | separate |
| SAV-120NS       | 12.0 | 10  | 18   | 440 | 420     | 655            | 50             | separate |
| SAV-150NS       | 15.0 | 13  | 23   | 590 | 420     | 655            | 75             | separate |
| SAV-180NS       | 18.0 | 17  | 29   | 590 | 420     | 655            | 75             | separate |
| SAV-180NS-V12   | 18.0 | 18  | 30   | 740 | 420     | 655            | 100            | separate |
| SAV-210NS-V12   | 21.0 | 22  | 35   | 740 | 420     | 655            | 100            | separate |
| SAV-240NS-V12   | 24.0 | 26  | 42   | 740 | 420     | 655            | 100            | separate |















# Nordex

Nordex heater is good for small and medium sized sauna rooms (for 3-6 persons). It has a flexible built-in control unit which gives you a choice to have the controls facing right, left or center. Nordex heater can hold 18 to 22 kg of stones.

Available in 4.5 kW, 6 kW, 8 kW and 9 kW.

| HEATER<br>MODEL | kW  | SAUNA ROOM<br>MIN MAX<br>(m³) |    | SIZE OF HEATER WIDTH DEPTH HEIGHT (mm) |     |     | STONES<br>(kg) | CONTROL  |
|-----------------|-----|-------------------------------|----|--|-----|-----|----------------|----------|
| NR-45NB         | 4.5 | 3                             | 6  | 410                                    | 300 | 500 | 18             | built-in |
| NR-60NB         | 6.0 | 5                             | 8  | 410                                    | 300 | 500 | 18             | built-in |
| NR-80NB         | 8.0 | 7                             | 13 | 410                                    | 300 | 575 | 22             | built-in |
| NR-90NB         | 9.0 | 8                             | 14 | 410                                    | 300 | 575 | 22             | built-in |
| NR-45NS         | 4.5 | 3                             | 6  | 410                                    | 300 | 500 | 18             | separate |
| NR-60NS         | 6.0 | 5                             | 8  | 410                                    | 300 | 500 | 18             | separate |
| NR-80NS         | 8.0 | 7                             | 13 | 410                                    | 300 | 575 | 22             | separate |
| NR-90NS         | 9.0 | 8                             | 14 | 410                                    | 300 | 575 | 22             | separate |















# Nimbus

Nimbus heater is a one of a kind design because it is totally covered by soapstones.

The heat inside the heater is well stored by soapstones that covers the heater. The stored heat in the soapstones contribute in increasing steam when water touched the sauna stones. Other than this, soapstones prolong the heat inside the sauna room after use. Concave soapstones on the topmost corners are scent basins to hold aroma oils.

The Nimbus heater is available in heating powers 9 kW, 10.5 kW, 12 kW, 15 kW, 18 kW, 21 kW and 24 kW.

| HEATER<br>MODEL | kW   | SAUNA<br>MIN<br>(n | ROOM<br>MAX | SIZ | E OF HE | ATER<br>HEIGHT | SAUNA<br>STONES<br>(kg) | SOAP<br>STONES<br>(kg) | CONTROL  |
|-----------------|------|--------------------|-------------|-----|---------|----------------|-------------------------|------------------------|----------|
| NIM-90NS        | 9.0  | 8                  | 14          | 520 | 470     | 690            | 50                      | 80                     | separate |
| NIM-105NS       | 10.5 | 9                  | 15          | 520 | 470     | 690            | 50                      | 80                     | separate |
| NIM-120NS       | 12.0 | 10                 | 18          | 520 | 470     | 690            | 50                      | 80                     | separate |
| NIM-150NS       | 15.0 | 13                 | 23          | 660 | 470     | 690            | 75                      | 100                    | separate |
| NIM-180NS       | 18.0 | 17                 | 29          | 660 | 470     | 690            | 75                      | 100                    | separate |
| NIM-180NS-V12   | 18.0 | 18                 | 30          | 820 | 470     | 690            | 100                     | 120                    | separate |
| NIM-210NS-V12   | 21.0 | 22                 | 35          | 820 | 470     | 690            | 100                     | 120                    | separate |
| NIM-240NS-V12   | 24.0 | 26                 | 42          | 820 | 470     | 690            | 100                     | 120                    | separate |











# **Altostratus**

The Altostratus heater is a balance of stainless steel and soapstones.

Altostratus heater is easy to install and it stands on the floor with an adjustable leg support. This model is designed to withstand intense heat and can hold up to 100 kg of sauna stones.

| HEATER<br>MODEL | kW   | SAUNA ROOM<br>MIN MAX<br>(m³) |    | SIZE OF HEATER WIDTH DEPTH HEIGHT (mm) |     |     | SAUNA<br>STONES<br>(kg) | STONES (kg) | CONTROL  |
|-----------------|------|-------------------------------|----|--|-----|-----|-------------------------|-------------|----------|
| ALTO-90NS       | 9.0  | 8                             | 14 | 460                                    | 460 | 705 | 50                      | 30          | separate |
| ALTO-105NS      | 10.5 | 9                             | 15 | 460                                    | 460 | 705 | 50                      | 30          | separate |
| ALTO-120NS      | 12.0 | 10                            | 18 | 460                                    | 460 | 705 | 50                      | 30          | separate |
| ALTO-150NS      | 15.0 | 13                            | 23 | 630                                    | 460 | 705 | 75                      | 40          | separate |
| ALTO-180NS      | 18.0 | 17                            | 29 | 630                                    | 460 | 705 | 75                      | 40          | separate |
| ALTO-180NS-V12  | 18.0 | 18                            | 30 | 780                                    | 460 | 705 | 100                     | 50          | separate |
| ALTO-210NS-V12  | 21.0 | 22                            | 35 | 780                                    | 460 | 705 | 100                     | 50          | separate |
| ALTO-240NS-V12  | 24.0 | 26                            | 42 | 780                                    | 460 | 705 | 100                     | 50          | separate |











The heat produced by Cirrus is well distributed from the floor up to the ceiling. Water thrown in front of the heater runs through the pockets of the soapstone that is then converted to pleasant steam.

The full sauna stone version of Cirrus is the Cirrus Rock. It is loaded up to 64 kG of sauna stones. The huge amount of sauna stones generate more steam inside your sauna. The Cirrus is best for those who wants to have a hotter sauna room temperature. Cirrus Rock is for those who enjoy a mild and long lasting steam.

Cirrus / Cirrus Rock heaters can be installed in \*Tandem Connection. Available as 3 to 9 kW.

\*Tandem connection is connecting more than one heater in a single control unit.

| HEATER<br>MODEL     | kW  | MIN | A ROOM<br>MAX<br>m³) | SIZE | OF HE | ATER<br>HEIGHT | STONES<br>(kg) | SOAPSTONES (kg) | CONTROL           |
|---------------------|-----|-----|----------------------|------|-------|----------------|----------------|-----------------|-------------------|
| CIR2-30NB/CIR2-30NS | 3.0 | 2   | 4                    | 410  | 210   | 970            | 6              | 23              | built-in/separate |
| CIR2-40NB/CIR2-40NS | 4.0 | 3   | 6                    | 410  | 210   | 970            | 6              | 23              | built-in/separate |
| CIR2-50NB/CIR2-50NS | 5.0 | 4   | 8                    | 410  | 210   | 970            | 6              | 23              | built-in/separate |
| CIR2-60NB/CIR2-60NS | 6.0 | 5   | 8                    | 410  | 210   | 970            | 6              | 23              | built-in/separate |
| CRR2-30NB/CRR2-30NS | 3.0 | 2   | 4                    | 410  | 240   | 970            | 46             | -               | built-in/separate |
| CRR2-40NB/CRR2-40NS | 4.0 | 3   | 6                    | 410  | 240   | 970            | 46             | -               | built-in/separate |
| CRR2-50NB/CRR2-50NS | 5.0 | 4   | 8                    | 410  | 240   | 970            | 46             | -               | built-in/separate |
| CRR2-60NB/CRR2-60NS | 6.0 | 5   | 8                    | 410  | 240   | 970            | 46             | -               | built-in/separate |
| CIR3-45NB/CIR3-45NS | 4.5 | 3   | 6                    | 570  | 210   | 970            | 10             | 34              | built-in/separate |
| CIR3-60NB/CIR3-60NS | 6.0 | 5   | 9                    | 570  | 210   | 970            | 10             | 34              | built-in/separate |
| CIR3-75NB/CIR3-75NS | 7.5 | 7   | 12                   | 570  | 210   | 970            | 10             | 34              | built-in/separate |
| CIR3-90NB/CIR3-90NS | 9.0 | 8   | 14                   | 570  | 210   | 970            | 10             | 34              | built-in/separate |
| CRR3-45NB/CRR3-45NS | 4.5 | 3   | 6                    | 570  | 240   | 970            | 64             | -               | built-in/separate |
| CRR3-60NB/CRR3-60NS | 6.0 | 5   | 9                    | 570  | 240   | 970            | 64             | -               | built-in/separate |
| CRR3-75NB/CRR3-75NS | 7.5 | 7   | 12                   | 570  | 240   | 970            | 64             | -               | built-in/separate |
| CRR3-90NB/CRR3-90NS | 9.0 | 8   | 14                   | 570  | 240   | 970            | 64             | -               | built-in/separate |













# Cumulus


Cumulus is elegant wall mounted heater that has a decorative soapstone on the front. The top soapstones have pockets to place aroma oil in them.

The Cumulus can hold up to 22 kG of sauna stones. Optional soapstone cubes can be added for a complete soapstone heater experience.

Available as 4.5 kW, 6 kW, 8 kW and 9 kW models in built-in or separate control unit.

| HEATER<br>MODEL | kW  | MIN | ROOM<br>MAX | SIZE | OF HEA | ATER<br>HEIGHT | SAUNA<br>STONES<br>(kg) | SOAP<br>STONES<br>(kg) | CONTROL  |
|-----------------|-----|-----|-------------|------|--------|----------------|-------------------------|------------------------|----------|
| CML-45NB        | 4.5 | 3   | 6           | 420  | 325    | 500            | 18                      | 10                     | built-in |
| CML-60NB        | 6.0 | 5   | 8           | 420  | 325    | 500            | 18                      | 10                     | built-in |
| CML-80NB        | 8.0 | 7   | 13          | 420  | 325    | 590            | 22                      | 10                     | built-in |
| CML-90NB        | 9.0 | 8   | 14          | 420  | 325    | 590            | 22                      | 10                     | built-in |
| CML-45NS        | 4.5 | 3   | 6           | 420  | 325    | 500            | 18                      | 10                     | separate |
| CML-60NS        | 6.0 | 5   | 8           | 420  | 325    | 500            | 18                      | 10                     | separate |
| CML-80NS        | 8.0 | 7   | 13          | 420  | 325    | 590            | 22                      | 10                     | separate |
| CML-90NS        | 9.0 | 8   | 14          | 420  | 325    | 590            | 22                      | 10                     | separate |



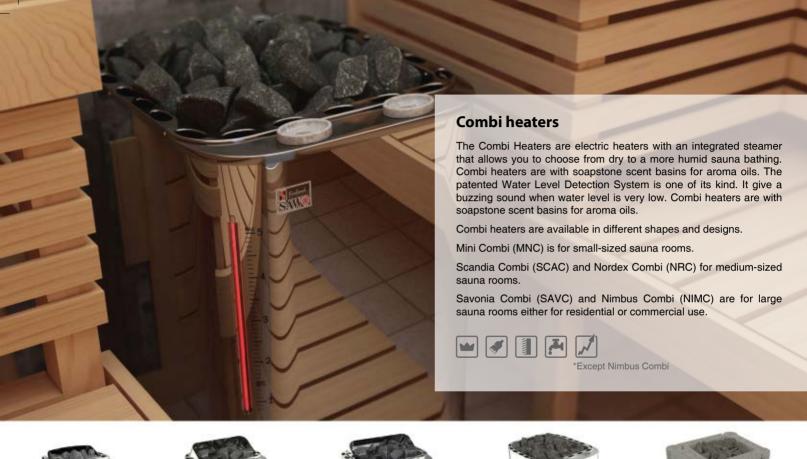





Scandia Combi







Nordex Combi

Savonia Combi

Nimbus Combi











Fiber Coated Scandia Fiber Coated Savonia







| Scandia Steam mate |  |
|--------------------|--|
|--------------------|--|

| HEATER<br>MODEL | kW  | SAUNA ROOM<br>MIN MAX<br>(m³) |    | WATER TANK | WIDTH | SIZE<br>DEPTH<br>(mm) | CONTROL |          |
|-----------------|-----|-------------------------------|----|------------|-------|-----------------------|---------|----------|
| STAR-105NS      | 1.0 | 1.3                           | 8  | 3.5 L      | 330   | 125                   | 480     | separate |
| STAR-210NS      | 2.0 | 7                             | 14 | 5.5 L      | 410   | 155                   | 560     | separate |





Experience the Genuine Finnish Sauna. Experience SAWO.

 $www.sawo.com \mid info@sawo.com$ 

www.facebook.com/sawosauna

